





Installation Drawing

Solenoid Operated Two Volume Control

PVV-200/250-BIB PUMP (SHOWN)
PVV-200/250-B1A PUMP
WITH R-U CONTROL

NOTES:

1. PUMPS DESIGNED FOR ONE-WAY SERVICE ARE DIMENSIONED AS SHOWN.
2. THESE UNITS ARE DESIGNED TO RUN CASE FULL OF FLUID AT ALL TIMES. FILL CASE BEFORE STARTING AND CONNECT DRAIN LINES ACCORDINGLY.
3. NUMERICAL DIMENSIONS ARE GIVEN IN MILLIMETERS.
4. NET WEIGHT- 177 KG SIDE PORTED (SHOWN)
166 KG REAR PORTED
5. FOR BASIC PUMP DIMENSIONS SEE:
DS-M47939
6. PUMP WILL STROKE TO MINIMUM VOLUME SETTING WHEN SOLENOID IS DE-ENERGIZED.

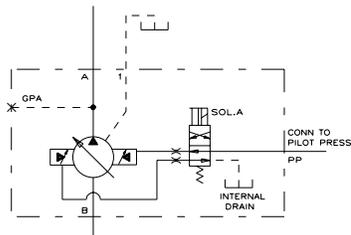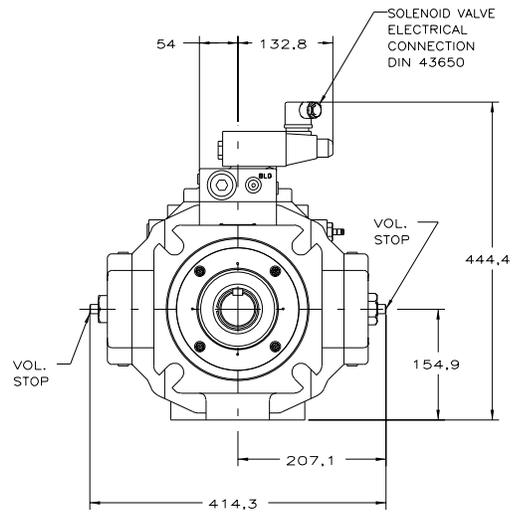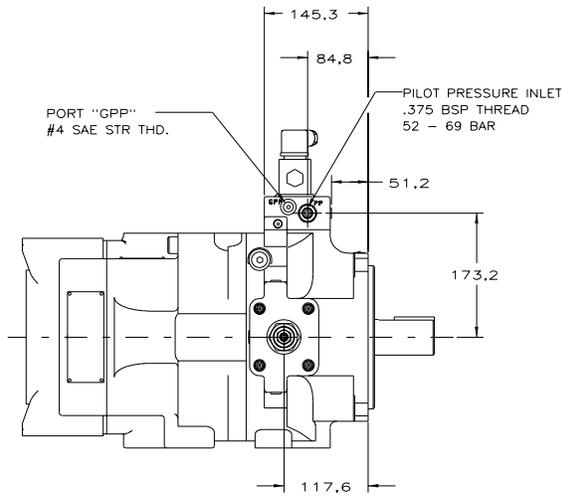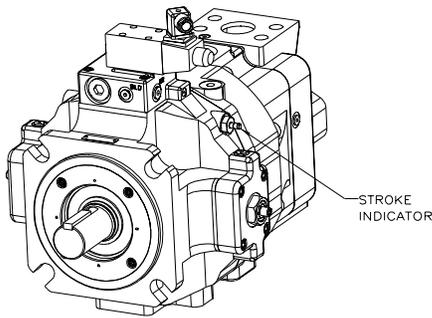

519103-304